ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

- 1. Put the deco.leaf onto top of the tube, then thread nipple(A) onto the tube tightly.
- 2. Assemble the nipple(B) onto the cross bar, and lock it in place by hex nut.
- 3. Attach the cross bar to outlet box using 2 outlet box screws upwards.
- 4. Determine the length of the chain you need using pliers to disconnect the extra chain and discard it away.
- 5. Weave fixture wires and ground wire through the nipple(A), fixture loop and every other chain links, top loop, top nut, canopy and nipple(B); secure the top loop to the nipple(B) and hang the chain to the top loop and the fixture loop.
- 6. Make wire connections:
 - --Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - --Attach white wire from light to white wire from power source with a wire nut.
 - --Attach black wire from light to black wire from power source with a wire nut.

 Observing: positive wire with positive wire,

Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.

- 7. Tuck the wire connections neatly into the outlet box.
- 8. Attach the canopy to the ceiling, then secure it with top nut.
- 9. Attach the deco.drop(A) & deco.drop(B) onto the fixture.
- 10. Put candle sleeve onto the socket.
- 11. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommeded on the fixture.)
- 12. Turn on the power at fuse or circuit box.

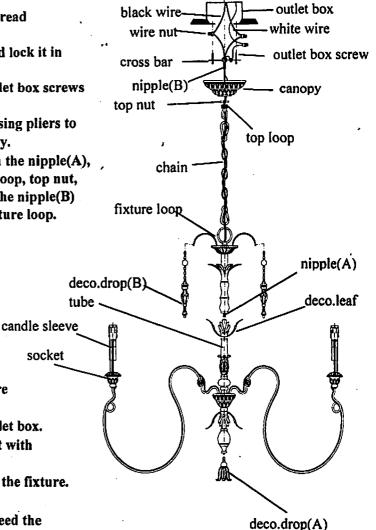

6006-6-70